

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
1 April 2004 (01.04.2004)

PCT

(10) International Publication Number
WO 2004/026027 A1

(51) International Patent Classification⁷: A01K 97/06, 97/00

(21) International Application Number:
PCT/AU2003/001231

(22) International Filing Date:
19 September 2003 (19.09.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2002951529 20 September 2002 (20.09.2002) AU

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant and

(72) Inventor: MASSIMINO, Salvatore [AU/AU]; 39 Maryland Street, Stafford Heights, Queensland 4053 (AU).


(74) Agents: THOMPSON, Paul, M. et al.; Davies Collison Cave, Level 3, 303 Coronation Drive, Milton, Queensland 4064 (AU).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: LINE AND TACKLE SECURING DEVICE

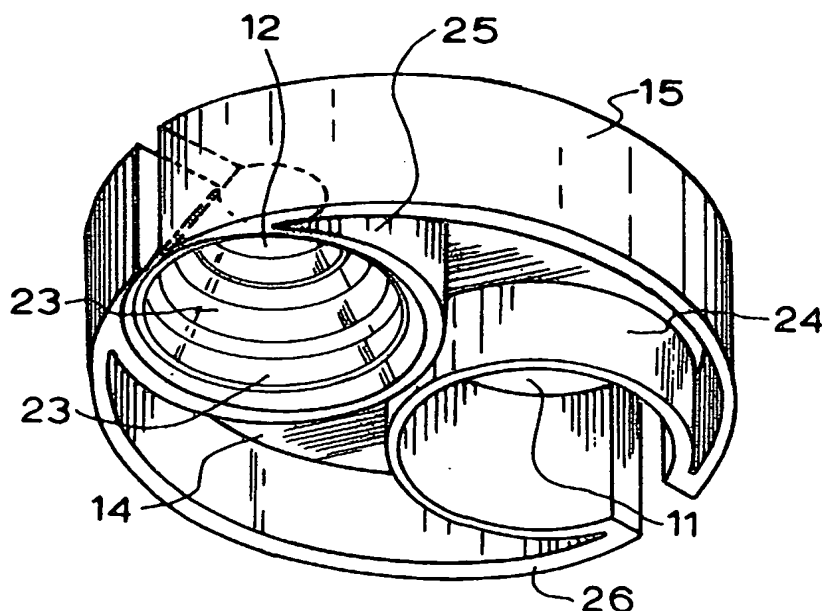

(57) Abstract: A securing device for securing a line and/or fishing tackle to a fishing rod. the securing device comprising a body, a first aperture (11) in the body adapted to engage the fishing rod and a second aperture (12) in the body spaced from the first aperture (11) and adapted to releasably engage the fishing line and/or an item of fishing tackle. In further embodiment the device may be formed with holes to receive hooks, and being preferably buoyant and formed in bright colours. A method of securing a line is also described.